



FEATURES

- 9-pin Sub-D Female connection for real-time sniffing of setpoint and actual position (SDP protocol)

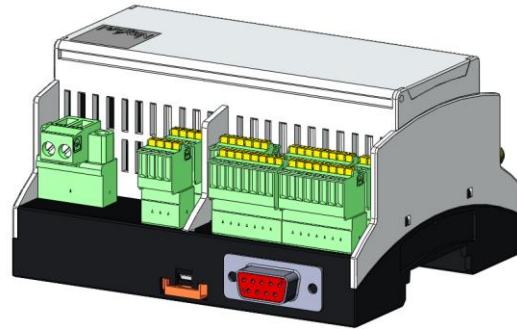

PIN DESCRIPTION

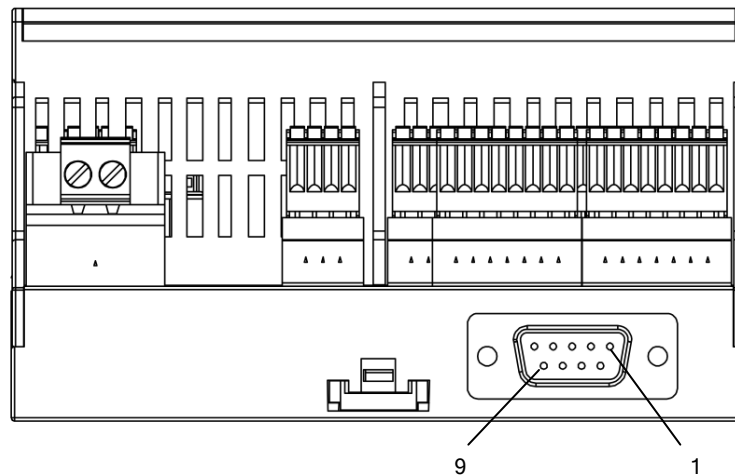

The 9-pin Sub-D Female connector has following signals:

| Pin No. | Name | Description |
|---------|------|---|
| 1 | CH1 | Shared Data Power - Channel1 (3,3V logic output, R _i 1K) |
| 2 | CH2 | Shared Data Power - Channel2 (3,3V logic output, R _i 1K) |
| 3 | CH3 | Shared Data Power - Channel3 (3,3V logic output, R _i 1K) |
| 5 | GND | Ground |